



MOTOROLA

TWO-WAY RADIOS

GP320: The Practical Radio

The GP320 offers a simple single channel solution for professionals who require a high quality and reliable product. These radios are easy to use with a basic push to talk operation and are an ideal entry into two-way radio use. Choose the Practical Radio when the communication you want needs to be simple and effective.



Operator friendly controls and features include:

- **Signalling**
The radio software encompasses Private Line™ and 5-tone selective signalling.
- **X-Pand™ Voice Compression and Low Level Expansion**
Crisp, clear and strong audio quality in virtually any noisy environment. Low level expansion allows further improvements in audio quality by reducing noise usually heard during pauses in conversation.
- **Emergency Signalling**
Sends help signal to a pre-defined person or group of people.
- **Lone Worker**
Added security and safety for individuals who work remotely from their team. The radio enters emergency mode if the user does not respond to the warning signal.
- **Adjustable Power Levels**
The radio output has two settings - low power extends battery life and high power allows the radio to transmit over a greater distance.
- **Voice Operated Transmit (VOX)**
Hands free operation when used with a VOX headset accessory.
- **Whisper**
Allows a user to speak quietly into a radio and still be heard clearly.
- **Time-out Timer**
Limits the amount of time a user has to continuously transmit on a channel. This allows for more efficient use of the channel.
- **Call Forward**
Allows calls to be forwarded to another radio user if you are unable to answer your calls personally.
- **Programmable Channel Spacing (12.5/20/25 KHz)**
Flexible and easy migration of channel spacing requirements in any situation.



As Dedicated As You Are

Professional Radio

GP320 Portable Two-Way Radio Specifications

General Specifications		
Channel Capacity	1	
Power Supply	Rechargeable battery 7.5v	
Dimensions: H x W x D (mm)	Height excluding knobs	
With standard high capacity NiMH battery	137 x 57.5 x 37.5	
With ultra high capacity NiMH battery	137 x 57.5 x 40.0	
With NiCD battery	137 x 57.5 x 40.0	
With Lilon battery	137 x 57.5 x 33.0	
Weight: (gm)		
With Standard high capacity NiMH battery	420	
With Ultra high capacity NiMH battery	500	
With NiCD battery	450	
With Lilon battery	350	
Average Battery Life @5/5/90 Cycle:	Low Power	High Power
With Standard high capacity NiMH battery	11 hours	8 hours
With Ultra high capacity NiMH battery	14 hours	11 hours
With NiCD battery	12 hours	9 hours
With Lilon battery	11 hours	8 hours
Sealing:	Withstands rain testing per MIL STD 810 C/D/E and IP54	
Shock and Vibration:	Protection provided via impact resistant housing exceeding MIL STD 810 C/D/E and TIA/EIA 603	
Dust and Humidity:	Protection provided via environment resistant housing exceeding MIL STD 810 C/D/E and TIA/EIA 603	

Portable Military Standards 810 C, D, & E						
Applicable MIL-STD	810C		810D		810E	
	Methods	Procedures	Methods	Procedures	Methods	Procedures
Low Pressure	500.1	1	500.2	2	500.3	2
High Temperature	501.1	1,2	501.2	1,2	501.3	1,2
Low Temperature	502.1	1	502.2	1,2	502.3	1,2
Temp. Shock	503.1	1	503.2	1	503.3	1
Solar Radiation	505.1	1	505.2	1	505.3	1
Rain	506.1	1,2	506.2	1,2	506.3	1,2
Humidity	507.1	2	507.2	2,3	507.3	2,3
Salt Fog	509.1	1	509.2	1	509.3	1
Dust	510.1	1	510.2	1	510.3	1
Vibration	514.2	8,10	514.3	1	514.4	1
Shock	516.2	1,2,5	516.3	1,4	516.4	1,4

Transmitter	
*Frequencies - Full Bandsplit	VHF: 136-174 MHz UHF: 403-470 MHz
Channel Spacing	12.5/20/25 kHz
Frequency Stability (-25°C to +55°C, +25° Ref.)	±2.5 ppm
Power	136-174: 1-5W 403-470: 1-4W
Modulation Limiting	±2.5 @ 12.5 kHz ±4.0 @ 20 kHz ±5.0 @ 25 kHz
FM Hum & Noise	-40 dB typical
Conducted/Radiated Emission	-36 dBm <1 GHz -30 dBm >1 GHz
Adjacent Channel Power	-60 dB @ 12.5 kHz -70 dB @ 20/25 kHz
Audio Response (300-3000Hz)	+1 to -3 dB
Audio Distortion	3%

Receiver	
*Frequencies - Full Bandsplit	VHF: 136-174 MHz UHF: 403-470 MHz
Channel Spacing	12.5/20/25 kHz
Frequency Stability (-25°C to +55°C, +25° Ref.)	±2.5 ppm
Sensitivity (12 dB SINAD) EIA	.25 µV typical
Sensitivity (20 dB SINAD) ETS	.50 µV typical
Intermodulation EIA	70 dB
Adjacent Channel Selectivity	60 dB @ 12.5 kHz 70 dB @ 20/25 kHz
Spurious Rejection	70 dB
Rated Audio	0.5W
Audio Distortion @ Rated Audio	3% typical
Hum & Noise	-40 dB @ 12.5 kHz -50 dB @ 20/25 kHz
Audio Response (300-3000 Hz)	+1 to -3 dB
Conducted Spurious Emission	-57 dBm <1 GHz -47 dBm >1 GHz ETS 300 086

Data for +25°C unless otherwise specified

*Availability subject to individual country's law and regulations.


Specifications are subject to change without notice and are issued for guidance purposes only.

All specifications listed are typical. Radios meet applicable regulatory requirements.

Conforms to EC directive 89/336/EEC

Complies with ETS 300 113

Contact your local Authorised Motorola Dealer to find out more about how communicating with the Professional Radio series will benefit your organisation.

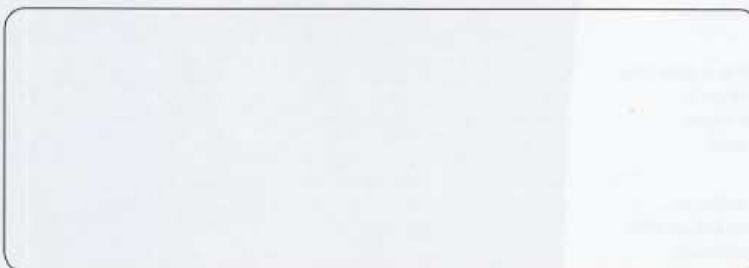

UK Sales Office

Middle East and Africa Headquarters:

Motorola Ltd
Jays Close, Viabes Industrial Estate
Basingstoke, Hampshire RG22 4PD
United Kingdom
Tel +44 (0) 1256 358211
Fax +44 (0) 1256 469838

Central Europe Headquarters

Eastern Europe, Turkey and Central Asia Headquarters:

Motorola GmbH
Heinrich Hertz Strasse 1
65232 Taunusstein
Germany
Tel. +49 6128 700
Fax+49 6128 951084

For exceptional performance, reliability and quality, Motorola Original accessories and batteries are the only options. For full details, please refer to the Professional Radio Series Accessories brochure.



Motorola, Professional Radios, As Dedicated As You Are and X-Pand are trademarks of Motorola Inc.

© 1998 Motorola, Printed in the United Kingdom
<http://www.mot.com>